



How it works?



3rd Step

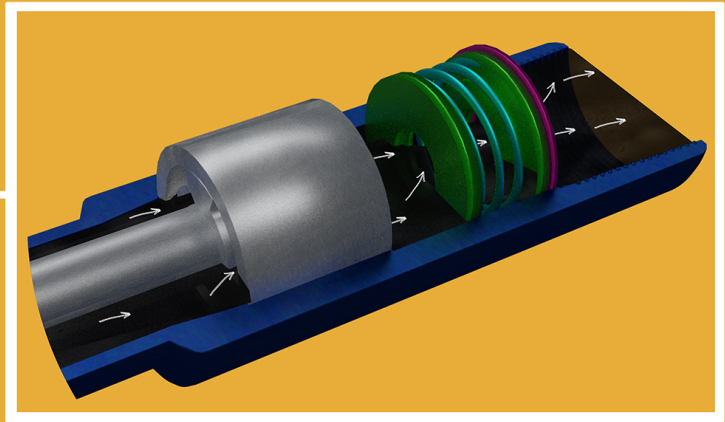

1st Step



Screen plugged


2nd Step



Fluid flowing through the top bypass valve

4 ft

Size	Slot	Open Area	Weight (Lbs)	Weight (in)
2 3/8	75	100.9	35.5	48
2 7/8	75	121.1	46	48
3 1/2	75	141.4	55	48

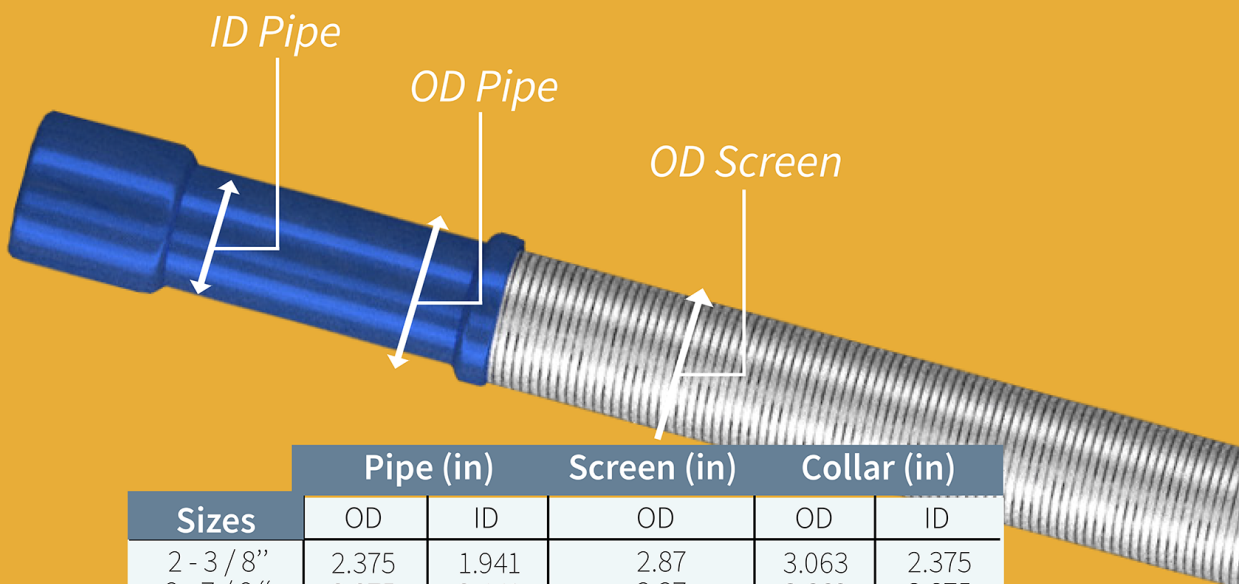

Sizes	Pipe (in)		Screen (in)	Collar (in)	
	OD	ID	OD	OD	ID
2 - 3/8"	2.375	1.941	2.87	3.063	2.375
2 - 7/8"	2.875	2.441	3.37	3.669	2.875
3 - 1/2"	3.5	3.066	3.94	4.5	3.5