



# TOP BYPASS VALVE™

Top Bypass Valve™ Patent No.: US 2017/0268322 A1



Intake system



Top Valve



Top Bypass Valve is the most recent solution created by OSI to guarantee the flow to the pump increasing the run time.

The main advantage is that the Top Bypass Valve is installed on top of the assembly ensuring the optimum opening when the pressure difference in the system is greater than 33 psi. Frequently, the pump intake is plugged by sand, scale or paraffin (or several problems simultaneously), with the installation of the Bypass Valve at the top of the assembly, the plugging issues wouldn't affect the run time.

Top Bypass Valve can be used in combination with any OSI system and its application has been tested around the world.

## BENEFITS

- Minimizes effects of plugging issues
- Reduces the risk of production loss
- Extend equipment run life.
- Large particle filtration.
- Valve is replaceable.

*Odessa Separator's Top Bypass Valve was made for extending pump's run life*




# TECHNICAL SPECIFICATION



4ft

Size	Slot	Open Area	Weight (Lbs)	Weight (in)
2 3/8	75	100.9	35.5	48
2 7/8	75	121.1	46	48
3 1/2	75	141.4	55	48

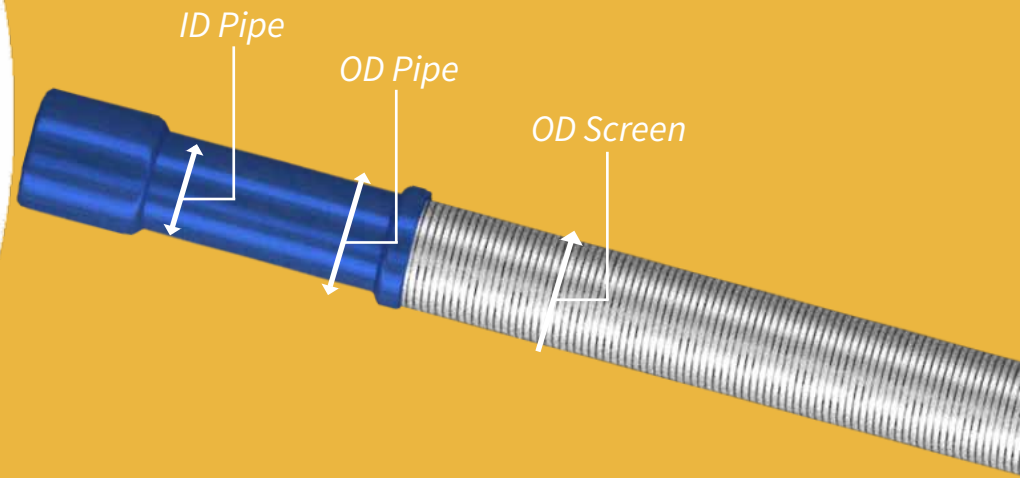

Sizes	Pipe (in)		Screen (in)	Collar (in)	
	OD	ID	OD	OD	ID
2 - 3/8"	2.375	1.941	2.87	3.063	2.375
2 - 7/8"	2.875	2.441	3.37	3.669	2.875
3 - 1/2"	3.5	3.066	3.94	4.5	3.5