
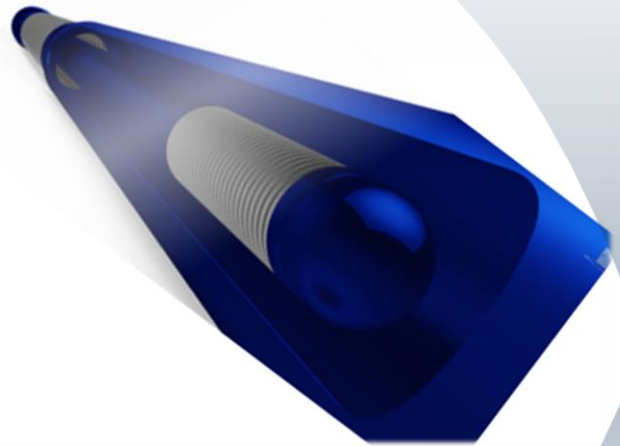
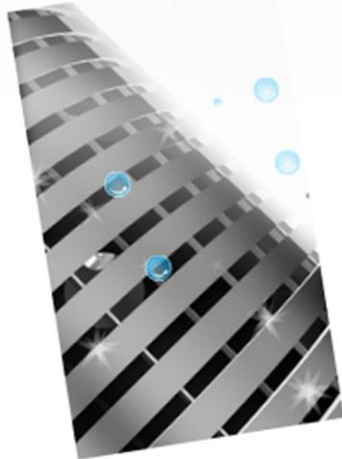


# Super Gas and Sand Shield

Odessa Separator's Super Gas & Sand Shield maximizes filtration and gas separation.

Allows you to use up to two 24 ft. Tubing Screens with 25 ft. Gas Separator body providing both filtration and separation. It has 48 or 68 ft. internally mounted dip tube. The Super Gas and Sand Shield is designed for severe gas and sand applications.

The Tubing Screens are also available in different slots sizes (8, 10, 12, 15, 20, 50, and 75). Can remove bull plug and run mud joint below with bull plug

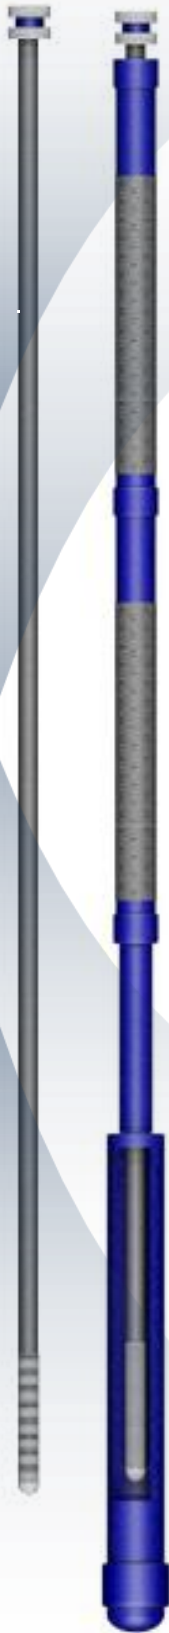

Super Gas and Sand Shield Data:

Body 25 ft.		
Size (OD)	Min CSG Size	Lbs.
2-3/8" x 3"	4-1/2"	180
2-7/8" x 3-1/2"	5-1/2"	250
2-7/8" x 4"	5-1/2"	279
2-7/8" x 4-1/2"	6-5/8"	305
3-1/2" x 4-1/2"	6-5/8"	320
3-1/2" x 5-1/2"	7"	375

**Benefits**

- Sand filtration.
- Reduces gas locking.
- Increases pumping efficiency.
- "V" shaped openings between wraps; provides self-cleaning action and greatly reduces flow friction.
- Available in different slots sizes.